


# Specifications

## SMART Response Interactive Response System

### Receiver and Clicker

#### Physical Specifications

<b>Receiver Size</b>	4 3/4" W × 7/8" H × 2 1/4" D (12 cm × 2.2 cm × 5.7 cm)
<b>Receiver Weight</b>	5 3/4 oz. (165 g)
<b>Clicker Size</b>	2 1/4" W × 5 5/8" H × 1 1/8" D (5.7 cm × 14.2 cm × 2.8 cm)
<b>Clicker Weight</b>	7 1/4 oz. (100 g) without batteries
<b>Shipping Weight</b>	24 clicker set – 12 lb. (5.4 kg) 32 clicker set – 14 lb. (6.3 kg)
<b>Shipping Size</b>	22 5/8" W × 7 3/4" H × 13 5/8" D (57.5 cm × 19.8 cm × 34.5 cm)

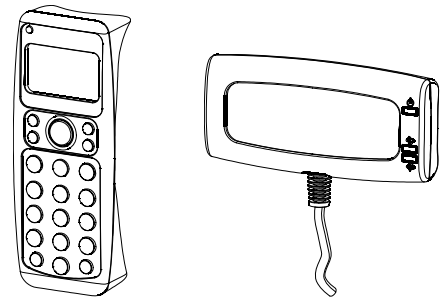

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg)

#### Standard Features

---

<b>Software</b>	SMART Response 2009 assessment software, including SMART Notebook software 10 for Windows® and Mac computers, is included on CD. Software upgrades are available at <a href="http://www2.smarttech.com/st/en-US/Support/Downloads">http://www2.smarttech.com/st/en-US/Support/Downloads</a> .
-----------------	---

---

<b>Technology</b>	RF 802.15.4
-------------------	-------------

---

<b>Radio Frequency</b>	2.40 GHz to 2.50 GHz ISM band
------------------------	-------------------------------

---

**Capacity** Supports up to 60 clickers with Model 1.1.3 receiver, and up to 40 clickers with Model 1.0.19 receiver.

---

## Receiver Features

---

**Transmission Power** 0 dBm with a typical range of 100' (30 m)

---

**Antenna** Integrated antenna

---

**Host Interface** USB 2.0 full-speed (12 Mbps) with a 6' (1.8 m) captive cable

---

**LED Indicators** Red and green LEDs indicate transmit and receive traffic and link status.

---

**Configuration** Plug and play (SMART Response software required)

---

## Clicker Features

---

**Transmission Power** 0 dBm with a typical range of 100' (30 m)

---

**Antenna** Integrated antenna

---

**LCD Display** 1" H × 1 5/8" W (24.6 mm × 41.6 mm), 100° viewing angle and a contrast ratio of 30:1

---

**Key Pad** Buttons include: numbers 0–9, letters A–J, TRUE (T), FALSE (F), YES (Y), NO (N), QUESTION MARK (?), PLUS/MINUS (±), FORWARD SLASH (/), UP, DOWN, DELETE, MENU, POWER

---

**Configuration** Plug and play (no additional software required)

---

**Batteries** 2 × AA alkaline

---

**Certifications and Compliance** CSA (U.S./Canada), IC (Industry Canada), C-Tick, VCCI, CE, FCC, RoHS (Europe), WEEE

---

**Warranty** Two-year limited equipment warranty

---

## Storage and Operating Specifications

---

<b>Operating Temperature</b>	32°F to 104°F (0°C to 40°C)
<b>Operating Humidity</b>	5% to 90% relative humidity
<b>Storage Temperature</b>	-40°F to 140°F (-40°C to 60°C)
<b>Storage Humidity</b>	5% to 90% relative humidity

---

## SMART Order Numbers

---

<b>SRP-24</b>	Includes 1 receiver, 24 clickers, carrying case for 40 clickers, Phillips® No. 1 screwdriver, 48 AA batteries, Quick Start Guide and software CD
<b>SRP-32</b>	Includes 1 receiver, 32 clickers, carrying case for 40 clickers, Phillips No. 1 screwdriver, 64 AA batteries, Quick Start Guide and software CD
<b>SRP-RMT-1</b>	Includes 1 clicker and 2 AA batteries
<b>SRP-RMT-5</b>	Includes 5 clickers and 10 AA batteries
<b>SRP-RCV-1</b>	Includes a receiver, Quick Start Guide and software CD
<b>SRP-CC</b>	Carrying case for 1 receiver and 40 clickers

---

## Physical Dimensions

