


Senteo™ Interactive Response System

Specifications – Receiver and Remote

Physical Specifications

Receiver Size	4 3/4" W x 7/8" H x 2 1/4" D (12 cm x 2.2 cm x 5.7 cm)
Receiver Weight	5 3/4 oz. (165 g)
Remote Size	2 1/4" W x 5 5/8" H x 1 1/8" D (5.7 cm x 14.2 cm x 2.5 cm)
Remote Weight	7 1/4 oz. (100 g) without batteries
Shipping Weight – 24 Remote Set	12 lb. (5.4 kg)
Shipping Weight – 32 Remote Set	14 lb. (6.3 kg)
Shipping Size	22 5/8" W x 7 3/4" H x 13 5/8" D (57.5 cm x 19.8 cm x 34.5 cm)

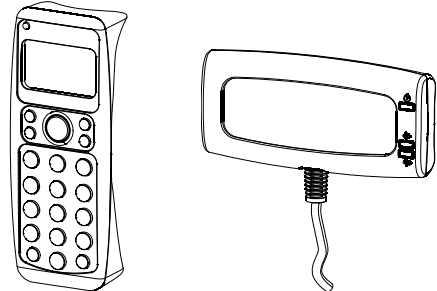

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

Standard Features

Software	Senteo™ assessment software, including Notebook™ software version 9.7 for Windows® and Mac computers, is included on an accompanying CD.
Technology	RF 802.15.4
Radio Frequency	2.40 GHz to 2.50 GHz ISM band
Capacity	Up to 40 remotes

Receiver Features

Transmission Power	0 dBm with a typical range of 100' (30 m)
Antenna	Integrated antenna
Host Interface	USB 2.0 full-speed (12 Mbps) with a 6' (1.8 m) captive cable
LED Indicators	Red and green LEDs indicate transmit and receive traffic and link status.
Configuration	Plug and play. (Senteo assessment software required.)

Remote Features

Transmission Power	0 dBm with a typical range of 100' (30 m)
Antenna	Integrated antenna
LCD Display	1" H x 1 5/8" W (24.6 mm x 41.6 mm), 100° viewing angle and a contrast ratio of 30:1
Key Pad	Buttons include: numbers 0–9, letters A–J, TRUE (T), FALSE (F), YES (Y), NO (N), QUESTION MARK (?), PLUS/MINUS (±), FORWARD SLASH (/), UP, DOWN, DELETE, MENU, POWER
Configuration	Plug and Play (no additional software required)
Batteries	2 x AA Alkaline
Certifications and Compliance	CSA (Canada/U.S.), IC (Industry Canada), C-Tick, VCCI, CE, FCC, RoHS (Europe), WEEE
Warranty	Two-year limited equipment warranty


Storage and Operating Specifications

Operating Temperature	32°F to 104°F (0°C to 40°C)
Operating Humidity	5% to 90% relative humidity
Storage Temperature	-40°F to 140°F (-40°C to 60°C)
Storage Humidity	5% to 90% relative humidity

SMART Order Numbers

SNT-24	Includes 1 receiver, 24 remotes, carrying case for 40 remotes, Phillips® No. 1 screwdriver, 48 AA batteries, Quick Start Guide and software CD
SNT-32	Includes 1 receiver, 32 remotes, carrying case for 40 remotes, Phillips No. 1 screwdriver, 64 AA batteries, Quick Start Guide and software CD
SNT-RMT-1	Includes 1 remote and 2 AA batteries
SNT-RMT-5	Includes 5 remotes and 10 AA batteries
SNT-RCV	Includes a receiver, Quick Start Guide and software CD
SNT-CC	Carrying case for 1 receiver and 40 remotes

Dimensions

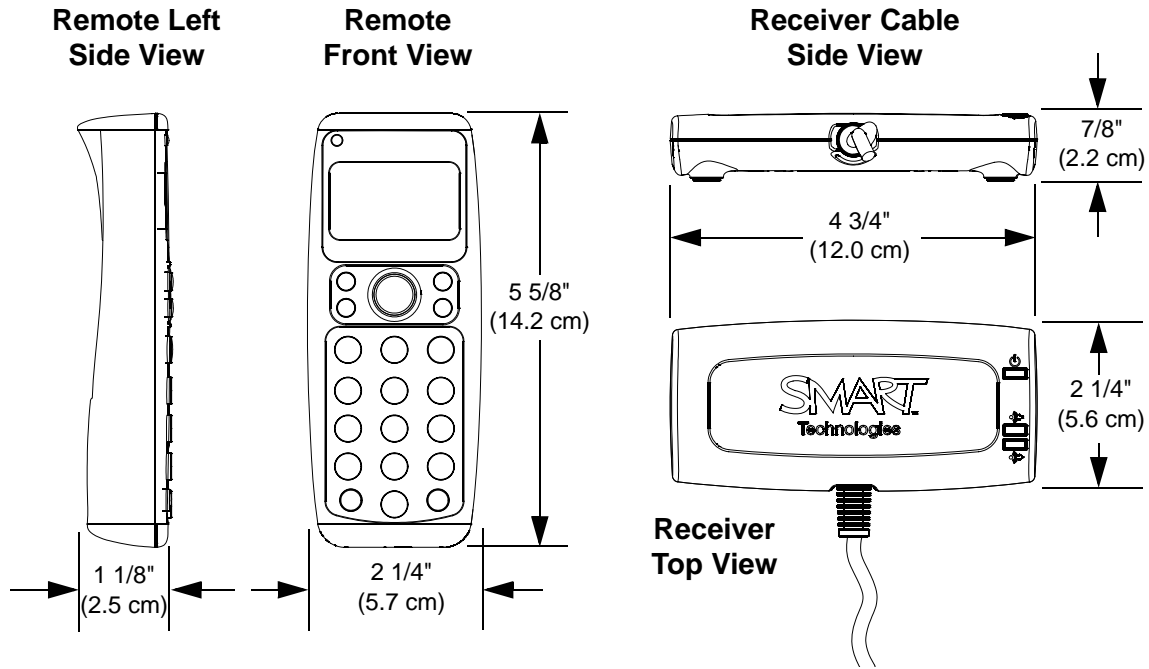

SMART Technologies
 1207 – 11 Avenue SW, Suite 300
 Calgary, AB T3C 0M5
 CANADA



www.smarttech.com/support www.smarttech.com/contactsupport
 Support +1.403.228-5940 or Toll Free 1.866.518.6791 (Canada/U.S.)