

# Actalyst™ Interactive Digital Signage


## Specifications – Models KLR352 and KPR352 for select 52" plasma panels

**NOTE:** For a complete list of supported flat-panel displays, visit the SMART Technologies [website](#).

### Physical Specifications

#### Size

Landscape Orientation	55 1/4" W × 35 1/4" H × 2 3/8" D (140.3 cm × 89.5 cm × 6.1 cm)
Portrait Orientation	35 1/4" W × 55 1/4" H × 2 3/8" D (89.5 cm × 140.3 cm × 6.1 cm)
<b>Weight</b>	52 lb. (23.6 kg)
<b>Shipping Size</b>	71" W × 55 1/4" H × 20 3/4" D (180.3 cm × 140.3 cm × 52.7 cm)
<b>Shipping Weight</b>	108 lb. (49 kg)

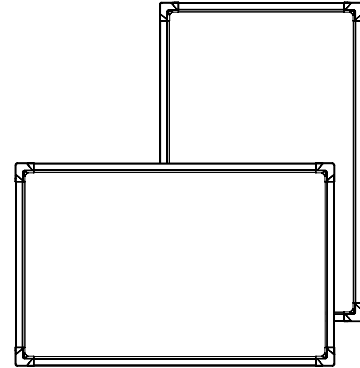

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

### Standard Features

<b>Software</b>	Actalyst™ interactive digital signage touch driver software. Software upgrades are available at <a href="http://www2.smarttech.com/st/en-US/Support/Downloads/default.htm">http://www2.smarttech.com/st/en-US/Support/Downloads/default.htm</a> .
<b>Controller</b>	You can mount the controller on the back of the interactive overlay with the two included thumbscrews. A modular cable connects the interactive overlay to the controller, and the controller connects to a computer with the included 21' 6" (6.5 m) USB/serial converter cable. The DB9 serial connector connects to the controller, and the USB connector connects to an available USB receptacle on the computer.
<b>Mounting Brackets</b>	Four mounting brackets secure the interactive overlay to the flat-panel display with eight No. 8-32 thumbscrews.
<b>Front Surface Material</b>	Hard-coated, anti-glare plastic designed for optimal light transmission. Chemical and scratch resistant.
<b>Digitizing Technology</b>	DViT™ (Digital Vision Touch) technology uses digital cameras in the top two corners of the interactive overlay to track an object interacting with the display surface.
<b>Power Requirements</b>	Switching power supply, 100V to 250V AC, 47 Hz to 63 Hz, 12V DC, 4.2A, 6' (1.8 m) power cord
<b>Power Consumption</b>	Up to 40 W
<b>Compliance</b>	CE, WEEE, RoHS (Europe), RoHS (China)
<b>Warranty</b>	Two-year limited equipment warranty
<b>Installation Notes</b>	You can install the interactive overlay on a flat-panel display that is securely mounted to a wall or floor stand. However, the wall mount or floor stand must be able to support a combined weight of 120 lb. (54.4 kg). Because of stability and mechanical fit issues, do not use table stands. You cannot attach speakers directly to the sides of a flat-panel display when an interactive overlay is installed. Do not install Actalyst interactive digital signage where it will be exposed to the weather or direct sunlight.

---

## Computer Requirements

<b>Windows® Computers</b>	Pentium® II 450 MHz processor 128 MB of RAM (256 MB recommended) 60 MB of free hard disk space Windows 2000, Windows XP or Windows Vista™ operating system Internet Explorer® Internet browser 6.0 or later
<b>Mac Computers</b>	700 MHz processor (1 GHz or faster recommended) 97 MB of RAM (256 MB recommended) 75 MB of free hard disk space Mac OS X version 10.4.x operating system software Safari® application program version 1.3.2 or later Supports both PowerPC® and Intel® processors (universal binary)
<b>Linux® Computers</b>	Pentium II 450 MHz processor 128 MB of RAM (256 MB recommended) 28 MB of free hard disk space Linux kernel version 2.6 or later X Window System™ version 11 release 6 (X11R6) or later (must support XRender, Xinerama™, XFixes, Xau and Xdmcp) glibc 2.3.3 (gcc 3.4.2) libstdc++6 GNOME™ 2.8.0+ or KDE® 3.3+ libraries (recommended) SUSE™ 10, Red Hat® Enterprise Linux 4 WS, Debian® 3.1 (Sarge), Ubuntu® 6.06 LTS or Fedora™ Core 3+

---

## Storage and Operating Specifications

<b>Storage</b>	-40°F to 95°F (-40°C to 35°C) with up to 95% humidity non-condensing
<b>Operation</b>	41°F to 95°F (5°C to 35°C) with up to 90% humidity non-condensing


---

## SMART Order Number


<b>KLR352</b>	Actalyst interactive overlay for select 52" plasma panels in landscape orientation
<b>KPR352</b>	Actalyst interactive overlay for select 52" plasma panels in portrait orientation

Dimensions


Front

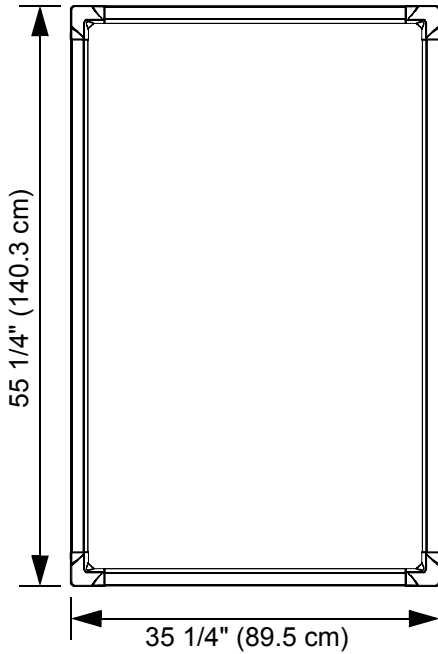

Side

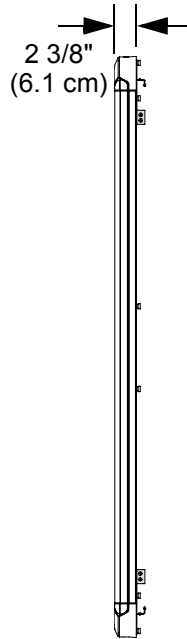

Back

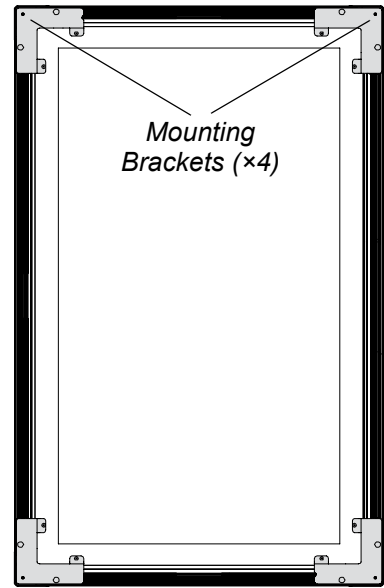

All dimensions +/- 1/8" (0.3 cm).