


Actalyst™ Interactive Digital Signage

Specifications – Models KLN365 and KPN365 for NEC LCD6520

NOTE: For a complete list of 300 series flat panel displays, visit the SMART Technologies [website](#).

Physical Specifications

Size	Landscape Orientation 66 3/4" W x 42 1/4" H x 2 3/8" D (169.5 cm x 107.3 cm x 6.1 cm)
	Portrait Orientation 42 1/4" W x 66 3/4" H x 2 3/8" D (107.3 cm x 169.5 cm x 6.1 cm)
Weight	70 lb. (31.8 kg)
Shipping Size	75 1/2" W x 55 1/4" H x 26" D (191.8 cm x 140.3 cm x 66 cm)
Shipping Weight	150 lb. (68 kg)

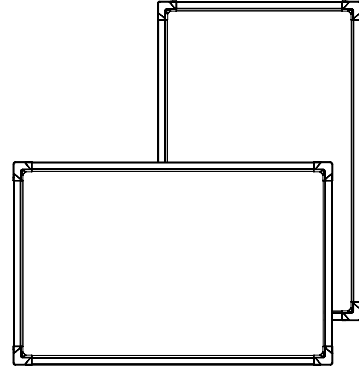

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

Standard Features

Software	Actalyst™ interactive whiteboard touch driver software. Software upgrades are available at http://www2.smarttech.com/st/en-US/Support/Downloads/default.htm .
Controller	You can mount the controller on the back of the interactive whiteboard with the two included thumbscrews. A modular cable connects the interactive whiteboard to the controller, and the controller connects to a computer with the included 21' 6" (6.5 m) USB/serial converter cable. The DB9 serial connector connects to the controller, and the USB connector connects to an available USB receptacle on the computer.
Mounting Brackets	Four mounting brackets secure the interactive whiteboard to the flat-panel display with eight No. 8-32 thumbscrews.
Front Surface Material	Hard-coated, anti-glare plastic designed for optimal light transmission. Chemical and scratch resistant.
Digitizing Technology	DViT™ (Digital Vision Touch) technology uses digital cameras in the top two corners of the interactive whiteboard to track an object interacting with the display surface.
Power Requirements	Switching power supply, 100V to 250V AC, 47 Hz to 63 Hz, 12V DC, 4.2A, 6' (1.8 m) power cord
Power Consumption	Up to 40 W
Compliance	CE, WEEE, RoHS (Europe), RoHS (China)
Warranty	Two-year limited equipment warranty
Installation Notes	You can install the interactive whiteboard on a flat-panel display that is securely mounted to a wall or floor stand. However, the wall mount or floor stand must be able to support a combined weight of 190 lb. (86.2 kg). Because of stability and mechanical fit issues, do not use table stands. You cannot attach speakers directly to the sides of a flat-panel display when an interactive whiteboard is installed. Do not install the Actalyst interactive whiteboard where it will be exposed to the weather or direct sunlight.

Computer Requirements

Windows® Computers	Pentium® II 450 MHz processor 128 MB of RAM (256 MB recommended) 60 MB of free hard disk space Windows 2000, Windows XP or Windows Vista™ operating system Internet Explorer® Internet browser 6.0 or later
Mac Computers	700 MHz processor (1 GHz or faster recommended) 97 MB of RAM (256 MB recommended) 75 MB of free hard disk space Mac OS X version 10.4.x operating system software Safari® application program version 1.3.2 or later Supports both PowerPC® and Intel® processors (universal binary)
Linux® Computers	Pentium II 450 MHz processor 128 MB of RAM (256 MB recommended) 28 MB of free hard disk space Linux kernel version 2.6 or later X Window System™ version 11 release 6 (X11R6) or later (must support XRender, Xinerama™, XFixes, Xau and Xdmcp) glibc 2.3.3 (gcc 3.4.2) libstdc++6 GNOME™ 2.8.0+ or KDE® 3.3+ libraries (recommended) SUSE™ 10, Red Hat® Enterprise Linux 4 WS, Debian® 3.1 (Sarge), Ubuntu® 6.06 LTS or Fedora™ Core 3+

Storage and Operating Specifications


Storage	-40°F to 95°F (-40°C to 35°C) with up to 95% humidity non-condensing
Operation	41°F to 95°F (5°C to 35°C) with up to 90% humidity non-condensing

SMART Order Number


KLN365	Actalyst interactive whiteboard for NEC LCD6520 in landscape orientation
KPN365	Actalyst interactive whiteboard for NEC LCD6520 in portrait orientation

Dimensions


Front

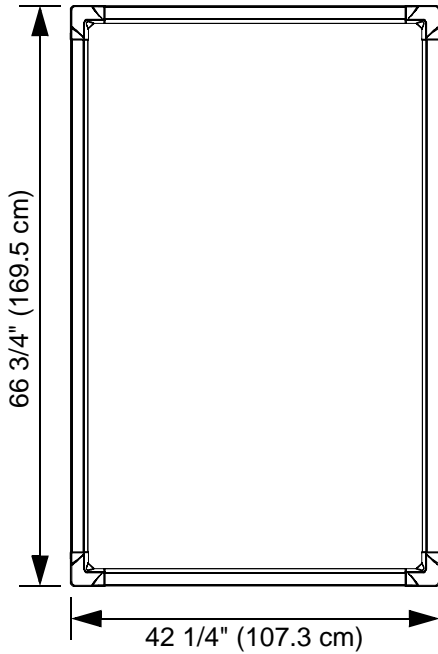

Side

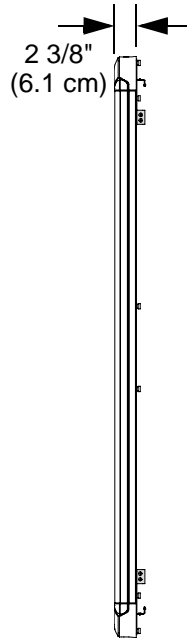

Back

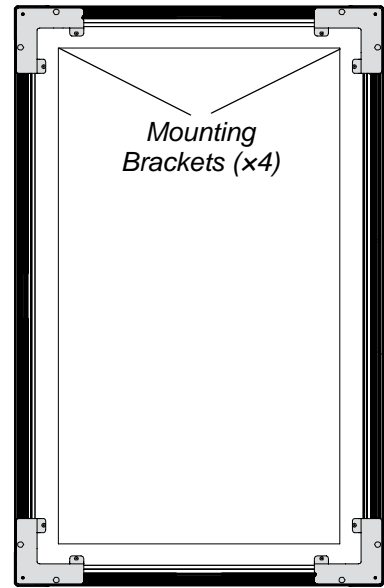

All dimensions +/- 1/8" (0.3 cm).