


## Specifications

# Actalyst™ Interactive Digital Signage

## Model KLX352 for Select 52" Flat-Panel Displays

### Physical Specifications

<b>Size</b>	55 1/4" W × 35 1/4" H × 2 3/8" D (140.3 cm × 89.5 cm × 6.1 cm)
<b>Weight</b>	73 lb. (33.1 kg)

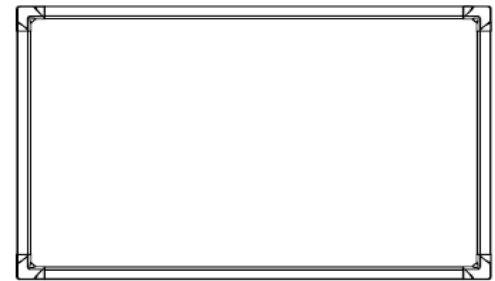

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg)

### Standard Features

<b>Software</b>	Actalyst™ interactive overlay touch driver software. Upgrades are available at <a href="http://www2.smarttech.com/st/en-US/Support/Downloads/default">http://www2.smarttech.com/st/en-US/Support/Downloads/default</a> .
<b>Controller</b>	You can mount the controller on the back of the interactive overlay with two included thumbscrews. A modular cable connects the interactive overlay to the controller, and the controller connects to a computer with the included 21' 6" (6.5 m) USB/serial converter cable. The DB9 serial connector connects to the controller, and the USB controller connects to an available USB receptacle on the computer.
<b>Mounting Bracket</b>	The mounting bracket has an adjustable depth feature to accommodate most 52" flat-panel displays installed in a landscape orientation.
<b>Front Surface Material</b>	Hard-coated, anti-glare plastic that's designed for optimal light transmission. Chemical and scratch resistant.

<b>Digitizing Technology</b>	DViT™ (Digital Vision Touch) technology uses digital cameras in the top two corners of the interactive overlay to track an object interacting with the display surface.
<b>Power Requirements</b>	Switching power supply, 100V–250V AC, 47 Hz–63 Hz, 12V DC 4.2A, 6' (1.8 m) power cable
<b>Power Consumption</b>	Power consumption is up to 40 W.
<b>Regulatory Certification</b>	CE
<b>Environmental Compliance</b>	EU RoHS, EU WEEE, EU REACH, EU Packaging, EU Battery and Accumulator, US CPSIA, US Toxics in Packaging, China EIP
<b>Warranty</b>	Two-year limited equipment warranty
<b>Installation Notes</b>	You can install the interactive overlay on a flat-panel display that will be securely mounted to a wall or floor stand. However, because of stability and mechanical fit issues, do not use a table stand. You're unable to attach speakers directly to the sides of a flat-panel display when you install an interactive overlay.

## Computer Requirements

<b>Windows® Computers</b>	Pentium II 450 MHz processor 128 MB of RAM (256 MB recommended) 60 MB of free hard disk space Windows 2000, Windows XP or Windows Vista™ operating system Internet Explorer® internet browser 6.0 or later
<b>Mac Computers</b>	700 MHz processor (1 GHz or faster recommended) 97 MB of RAM (256 MB recommended) 75 MB of free hard disk space Mac OS X version 10.4.x operating system software Safari application program version 1.3.2 or later SMART Board software version 9.7 or later supports both PowerPC® and Intel® processors (universal binary)
<b>Linux® Computers</b>	Pentium II 450 MHz processor 128 MB of RAM (256 MB recommended) 28 MB of free hard disk space Linux kernel version 2.6 or later X Window System version 11 release 6 (X11R6) or later (must support XRender, Xinerama, XFixes, Xau and Xdmcp) glibc 2.3.3 (gcc 3.4.2) libstdc++6 GNOME™ 2.8.0+ or KDE® 3.3+ libraries (recommended) SUSE™ 10, Red Hat® Enterprise Linux 4 WS, Debian® 3.1 (Sarge), Ubuntu® 6.06 LTS or Fedora™ Core 3+

## Storage and Operating Specifications


<b>Storage</b>	-40°F to 95°F (-40°C to 35°C) with up to 80% humidity (non-condensing)
<b>Operation</b>	41°F to 95°F (5°C to 35°C) with up to 80% humidity (non-condensing)

**3 | SPECIFICATIONS – ACTALYST INTERACTIVE DIGITAL SIGNAGE – MODEL  
KLX352 FOR SELECT 52" FLAT-PANEL DISPLAYS**

**SMART Order Number**

**KLX352** Actalyst interactive overlay for select 52" flat panel displays in landscape orientation

## Physical Dimensions

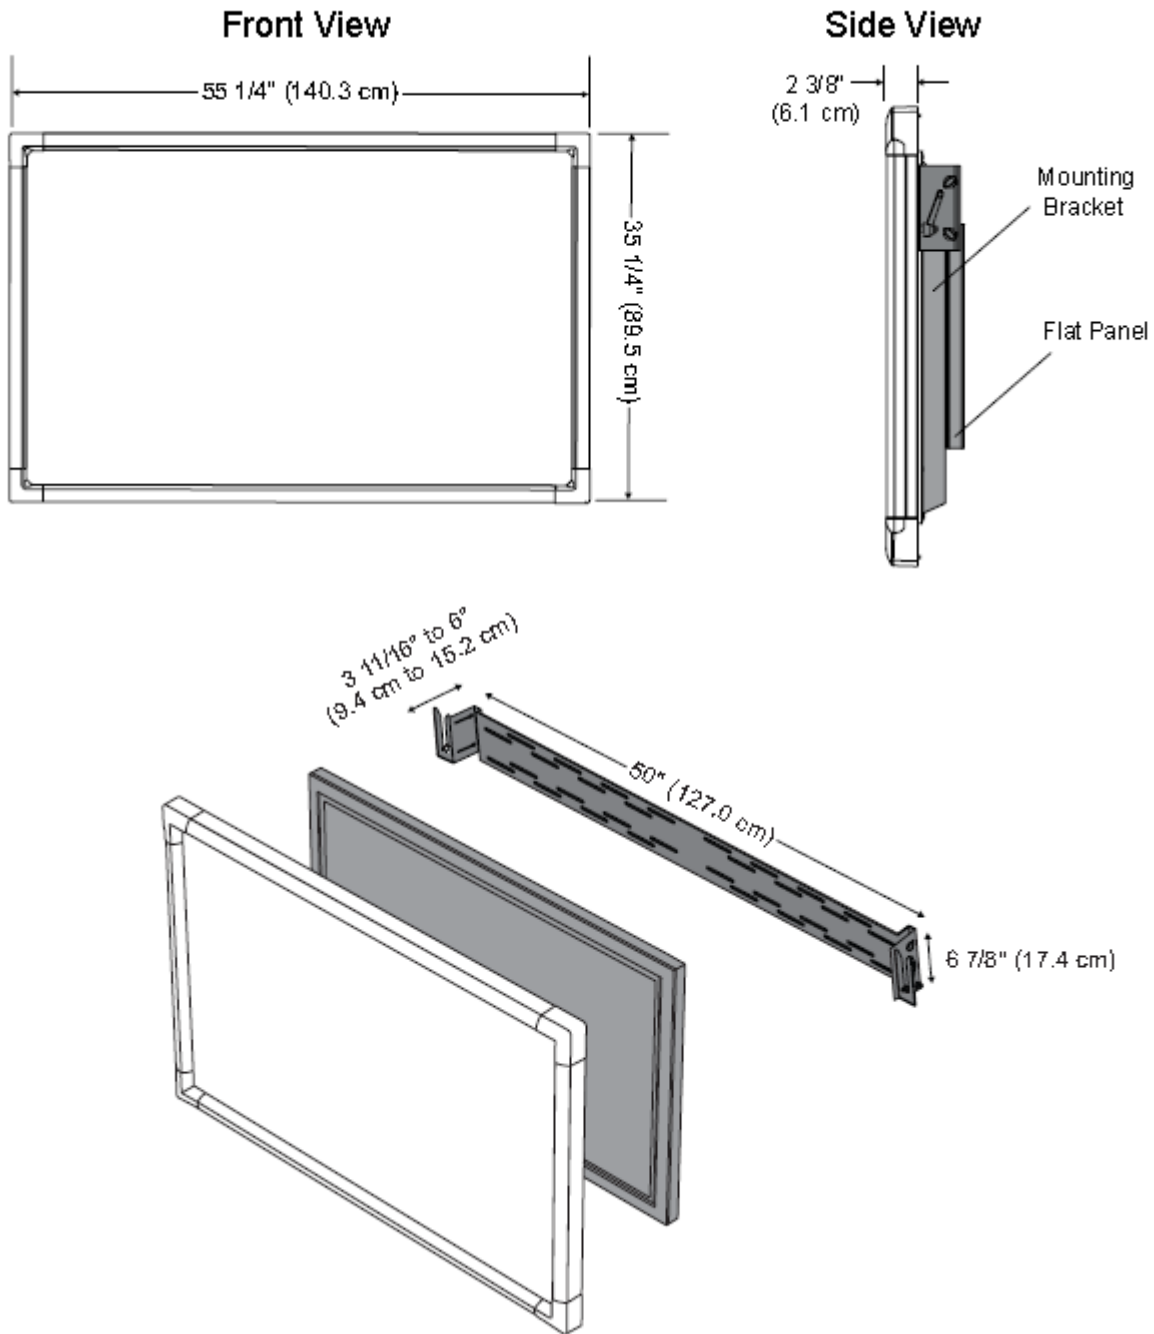

[www.smarttech.com/support](http://www.smarttech.com/support) [www.smarttech.com/contactsupport](http://www.smarttech.com/contactsupport)  
Support +1.403.228.5940 or Toll Free 1.866.518.6791 (U.S./Canada)

**SMART**<sup>™</sup>

©2009 SMART Technologies ULC. All rights reserved. Actalyst, DVIT, the SMART logo and smarttech are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. All other third-party product and company names may be trademarks of their respective owners. Patent No. US5448263; US6141000; US6337681; US6747636; US6803906; US6919880; US6947032; US6954197; US7184030; US7236162; US7289113; US7411575; CA2058219; CA2386094; EP1297488; ES2279823; ZL0181236.0; and DE60124549. Other patents pending. Contents are subject to change without notice. 04/2009.