


# GoWire™ SMART Board™ Software Auto-launch Cable

## Specifications – USB-GW

### Physical Specifications

|                        |  |
|------------------------|--|
| <b>Length</b>          | 7' (2.1 m)   |
| <b>Weight</b>          | 4 oz. (111.0 g)  |
| <b>Shipping Size</b>   | 9 1/4" W × 6 1/2" H × 2" D<br>(23.5 cm × 16.6 cm × 5.0 cm) |
| <b>Shipping Weight</b> | 6 1/2 oz. (189.0 g)  |

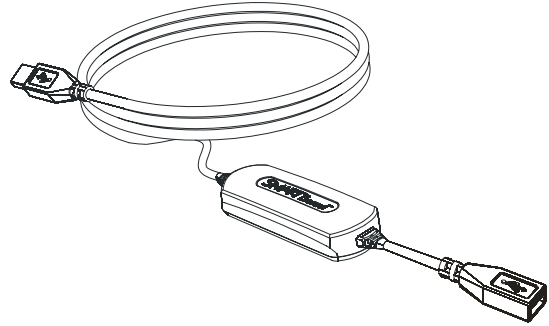

### Standard Features

#### Software

The GoWire™ cable contains SMART Board™ software and launches it automatically, providing full access to all software tools. GoWire cable software upgrades are available at [www2.smarttech.com/st/en-US/Support/Downloads/SBS/SBSv95GoWire.htm](http://www2.smarttech.com/st/en-US/Support/Downloads/SBS/SBSv95GoWire.htm).

#### Connectors

USB A receptacle provides a connection to a peripheral device, such as a SMART Board interactive whiteboard

USB A plug connects to a USB 1.1 or 2.0 receptacle on the host computer

#### Certifications

FCC, CE, VCCI

### Storage and Operating Specifications

|                  |  |
|------------------|--|
| <b>Storage</b>   | -40°F to 104°F (-40°C to 40°C)                                   |
| <b>Operating</b> | 32°F to 104°F (0°C to 40°C), up to 95% humidity (non condensing) |

### SMART Board Software 9.7 Computer Requirements

#### Windows® Computers

Pentium® II 450 MHz processor  
256 MB of RAM (512 MB recommended)  
150 MB of free hard disk space for minimum installation (840 MB for full installation with Gallery collections)  
Windows 2000, Windows XP or Windows Vista™ operating system  
Internet Explorer® internet browser 6.0 or later  
Adobe® Flash® player version 8

#### Requirements for SMART Video Player

Pentium II 450 MHz processor (700 MHz or faster recommended)  
Windows 2000 operating system or later  
Microsoft® DirectX® technology 8.1 or later

#### Mac Computers


700 MHz processor (1 GHz or faster recommended) PowerPC® G3, G4 or G5 processors and Intel® processors (universal binary)  
256 MB of RAM (512 MB recommended)  
85 MB of free hard disk space for minimum installation (825 MB for full installation with Gallery collections)  
Mac OS X version 10.4.x operating system software  
Safari application program version 1.3.2 or later

## Specifications – Model USB-GW

### Linux® Computers

Pentium II 450 MHz processor  
128 MB of RAM (256 MB recommended)  
225 MB of free hard disk space for minimum installation (800 MB for full installation with Gallery collections)  
Linux kernel version 2.6 or later  
X Window System™ version 11 release 6 (X11R6) or later (must support XRender, Xinerama™, XFixes, Xau and Xdmcp)  
glibc 2.3.3 (gcc 3.4.2)  
libstdc++6  
GNOME™ 2.8.0+ or KDE® 3.3+ libraries (recommended)  
SUSE™ 10, Red Hat® Enterprise Linux 4 WS, Debian® 3.1 (Sarge), Ubuntu® 6.06 LTS or Fedora™ Core 3+

### Dimensions

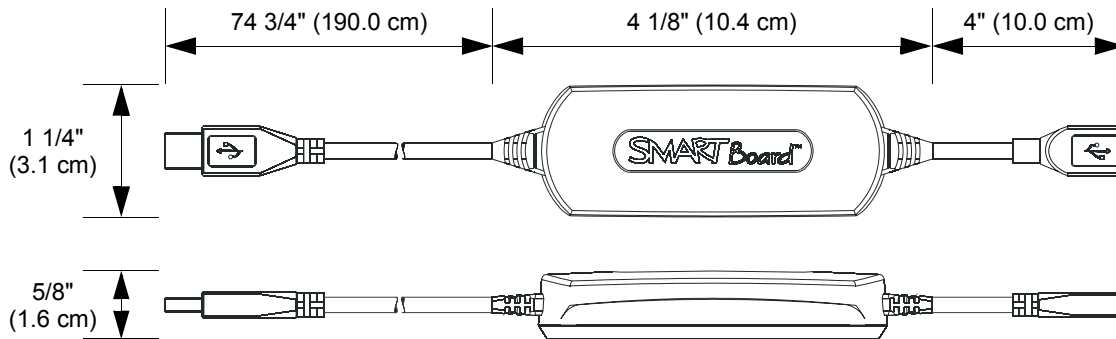

### SMART Order Number

USB-GW

GoWire SMART Board software auto-launch cable

### SMART Technologies

1207 – 11 Avenue SW, Suite 300

Calgary, AB T3C 0M5

CANADA

Phone +1.403.245.0333

Toll Free 1.888.42.SMART (Canada/U.S.)

info@smarttech.com www.smarttech.com

**SMART**  
Technologies

© 2006-2007 SMART Technologies ULC. All rights reserved. GoWire, SMART Board, Notebook and the SMART logo are registered trademarks or trademarks of SMART Technologies ULC. Microsoft, Windows and Windows NT are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. All other third-party product and company names may be trademarks of their respective owners. Patent No. US5448263; US6141000; US6326954; US6337681; US6540366; US6741267; US6747636; US7151533; and CA2058219. Other patents pending. Specifications are subject to change without notice. 11/2007.